


**SONNET WIRELESS CHARGING STATION  
AM/FM .9" LED CLOCK RADIO  
WITH BLUETOOTH, AUX IN AMPLIFICATION  
AND 2 USB PORTS**

**MODEL NO. R-1212**

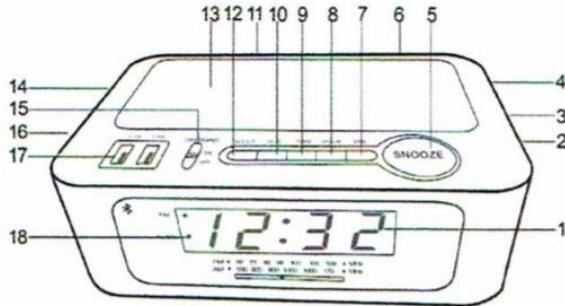

**FUNCTION KEYS**

- |                             |                            |
|-----------------------------|----------------------------|
| 1. LED Display              | 10. Alarm Set Button       |
| 2. Tuning                   | 11. FM Antenna             |
| 3. FM/AM/B/AUX Selector     | 12. Sleep Button           |
| 4. Volume/Buzzer Controller | 13. Wireless Charging Area |
| 5. Snooze Button            | 14. Speaker                |
| 6. Aux Cable                | 15. Charging ON/OFF Switch |
| 7. Minute Set Button        | 16. ON/OFF/AUTO Switch     |
| 8. Hour Set Button          | 17. USB Charging Output    |
| 9. Time Set Button          | 18. Alarm On Indicator     |

**OPERATING INSTRUCTIONS**

1. Power Source: Plug the AC line cord into the 120v/60Hz power outlet. The unit is now working and the display figures will blink to show that the correct time needs to be set.
2. Setting the Time: Press the TIME SET button together with the HOUR button or MINUTE button to set the correct time.
3. Setting the Alarm Time: Press the ALARM SET button to check the alarm time. Press the ALARM SET button together with the HOUR button or MINUTE button to adjust the desired alarm time. Slide the ON/OFF/AUTO switch to AUTO position. A glowing dot will appear on the lower left corner of the display to indicate that the alarm has been set to operate.
4. To Play the Radio: Slide the ON/OFF/AUTO switch to ON. Slide the FM/AM/BT/AUX selector to desired FM or AM band. Choose the radio station you want by turning the TUNING knob. You can expand the FM antenna for better signal. Adjust the VOLUME knob to your desired listening level.
5. To Wake to Radio: Set the alarm time as previously instructed. Turn the radio on to your desired radio station and volume as previously described. Slide the ON/OFF/AUTO switch to AUTO position. Your unit is now set to turn on automatically at the pre-selected alarm time. To turn the radio off, slide the ON/OFF/AUTO switch to OFF position.
6. To Wake to Buzzer: Set the alarm time as previously instructed. Slide the ON/OFF/AUTO switch to AUTO position. Turn the VOLUME knob down until it clicks. You will be awakened at the pre-selected alarm time by the buzzer tone. To turn the buzzer off, slide the ON/OFF/AUTO switch to OFF position.
7. Aux-In Amplification: You can amplify the sound from your MP3, iPod or any audio device through this clock radio. Plug the AUX cable into the earphone jack of your portable device. Turn your portable device on. Slide FM/AM/BT/AUX selector to AUX and adjust the VOLUME to your desired level.
8. USB Charging and Wireless Charging: Push the CHARGING ON/OFF switch to ON position. You can use the USB Ports to charge your smartphone or tablet or you can place your device on the WIRELESS CHARGING area. When you slide the selector to OFF the charging will stop.
9. Bluetooth Function: You can use the Bluetooth function to amplify the sound from your Bluetooth enabled device. Push the ON/OFF/AUTO button to ON position and adjust the VOLUME knob. Push the FM/AM/BT/AUX selector to BT position. The Bluetooth is now on. Open the Bluetooth function on your device and it will auto-search for R-1212. Select it and your device will be paired to the clock. You can adjust the volume to your desired level on the clock and/or your device.
10. Sleep Control: Slide the ON/OFF/AUTO switch to AUTO position. Press the SLEEP set button to display the sleep time. The display will indicate 59 minutes. If you wish the radio to play for a shorter period press the SLEEP button together with the MINUTE button to set the desired time period. If you wish the radio to play for a longer period press the SLEEP button together with the HOUR button to play for 1 hour and 59 minutes (this is the maximum sleep time). Press the SLEEP set button. The radio will turn on automatically and will turn itself off when the preset time has passed. To turn the radio off before the sleep time expires, press SNOOZE button.
11. Alarm Off: Slide the ON/OFF/AUTO switch to OFF position. The alarm will not sound again unless you switch it back to the AUTO position. If you use the ALARM button to shut off the alarm, then alarm will ring again the next day at the set alarm time.
12. Battery Back Up: This clock has a battery back up feature in case of power failure. A 9 volt battery (not included) is required. You must put in a battery to ensure the feature is ready in case of power failure. If the power fails, the back up battery will automatically continue operation of the clock and maintain actual time. However, the display will not be lit. When electrical power is restored, the display will light up again. The battery will maintain timekeeping for approximately 8 hours during power failure or interruption. NOTE: Remove the battery if the clock is to be unplugged for a long period of time to avoid battery drain.